





PLASTERJET - THE MULTI FUNCTIONAL

FACTS

Type: Multi functional plasterjet pump

Use: Plastering, renovation, injection and pump operations

Innovation: Continuous mixer mounted (optional)

FEATURES




- Plaster nozzle, construction mortar, filling and anchor mortar, fire protection mortar, injection mortar and tile filling
- Can be issued either with a gearbox engine (5.5 kW – 7.5 kW) with variable speed
- Upon request a continuous mixer can be mounted on top
- Large power spectrum (variable transmission – installation of various pumps)
- Maximum granulation 6 mm



Replaceable flange bearing for various pumps



Plasterjet with mounted continuous mixer Maltech M25

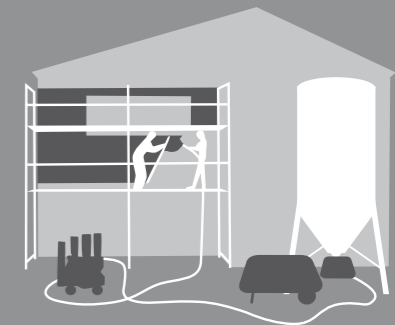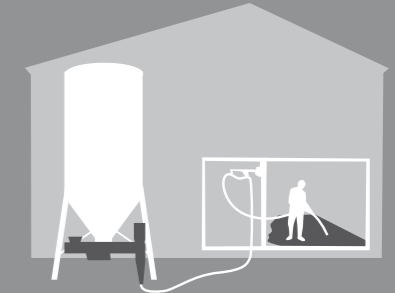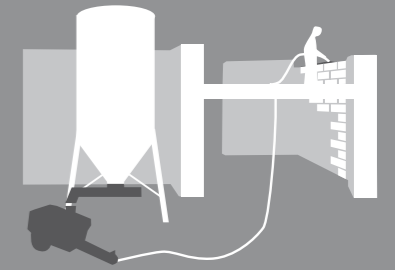

TECHNICAL DATA

Gearbox Mod. 1	Vario
	7,5 kW 400 V
Gearbox Mod. 2	Standard
	7,5 kW 400 V
Pump	50/7/R WF
Transport capacity*	approx. 10- 40 l/min.
Hose	Ø 35 mm
Compressor	V-Meko 400 l/min.
Continuous mixer	M25/4 4 kW 400 V
Mixing capacity*	approx. 45 l/min.

MEASURE + WEIGHT

Length	2200 mm
Width	650 mm
Height	730 mm
Weight	330 kg

MACHINERY

- Frame with wheels
- Control box
- Gearmotor with variable speed

* Approximate values that may vary according to type and consistency of the material used